

GLOBAL


Catalogue
2025

DELIVERING PREMIUM ENERGY





Looking for a specific battery?
Try our Battery Finder!



Battery Finder
at www.sebang-europe.com

About SEBANG

Battery Technologies

Products

Technical Information

Content

Company Introduction	4
History	6
Sustainability	8
Locations	9
AGM Technology	10
EFB Technology	12
SLI Technology	16
Deep Cycle Technology	18
AGM Series	20
EFB Series	21
SLI Series	22
Commercial Batteries	24
Marine & Leisure Batteries	26
Motive Batteries	27
Terminal & Layout	28
Base Hold Down	29
Battery Principles & Features	30
Safety Advice	31

SEBANG Global Battery

Powering a Convenient and Happy Future.

SEBANG Global Battery is Korea's No. 1 battery manufacturer, located in Frankfurt am Main, Germany. We are trusted OE partners of BMW, Volkswagen, Hyundai & KIA. For the Independent After-market, we are your reliable partner for high-quality batteries.

We are committed to delivering „Energy for people“ and creating a „Convenient and happy future“. For over half a century, we have led the Korean battery industry with our flagship brand, „ROCKET“. Through continuous innovation and agile management, we are evolving into a fu-

ture-focused energy company. Our relentless pursuit of technological excellence has positioned us among the top 5 battery manufacturers globally, with exports reaching over 130 countries.

“The value of Sebang Global Battery comes from people.

The goal of Sebang Group's corporate management includes energy, logistics, environment and social contribution projects which are in people's convenient lives and better future. To do this, the Sebang Group will do our best and focus all its resources on what we have to do for tomorrow.

Sang Woong Lee
Sebang Group Chairman



Battery for better life.

Pioneering a Comfortable and Happy Future



With a focus on advanced technology and new business areas, the company is dedicated to creating a comfortable and happy world. By enhancing R&D in soft cells, ESS, and BMS, and strengthening core business capabilities, we aim to stay ahead in future energy fields.



Expertise in Battery Technology

Our strength lies in deep expertise in battery technology, encompassing research, production, and manufacturing of condensed batteries. The focus remains on improving conventional battery quality, boosting cost efficiency, and preparing for the lithium battery market with versatile lithium packs.

Leading the Future of Energy Storage



Energy storage and utilization are at the heart of the future energy industry. Through investment in lithium pack technology for diverse applications — ranging from large ESS to electric vehicles and solar-powered homes — these initiatives will drive future growth for Sebang Group.



Since 1952

73 Years of Experience



N°1 in Korea

Top 5 Worldwide



1.6B \$

Sales Turnover



25M Units

Production Capacity



European Head Office

in Frankfurt, Germany




130+ Countries

with satisfied Customers



OE Supplier

BMW, Volkswagen & more

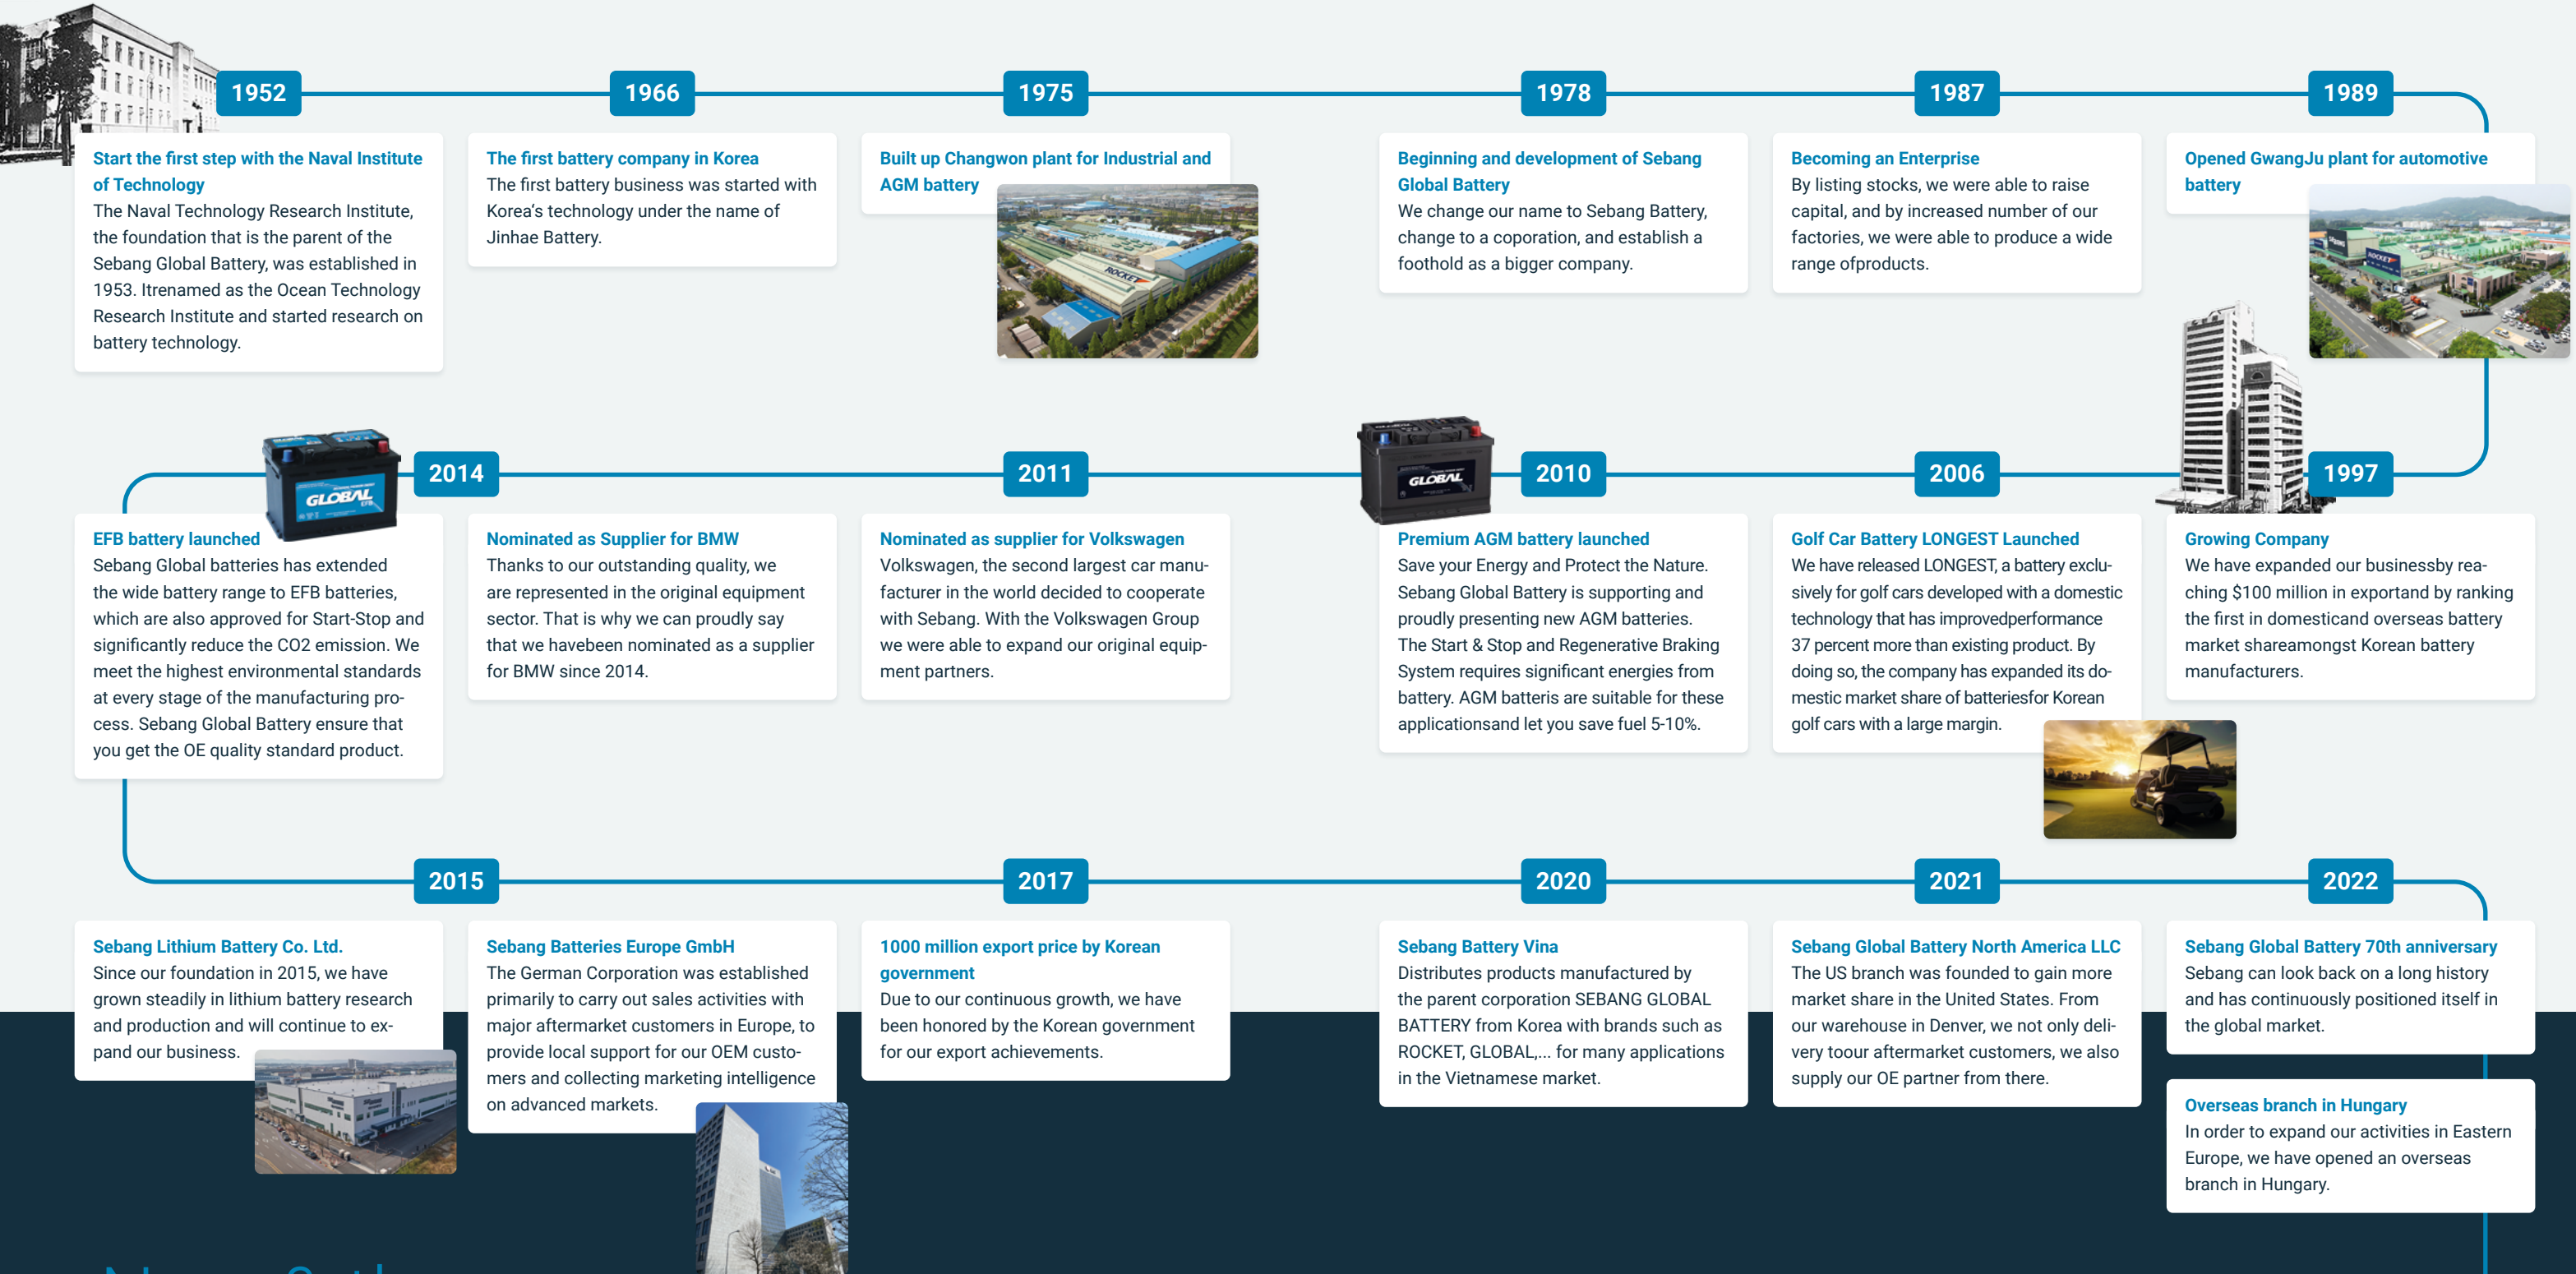

Now & then

The History of SEBANG Global Battery.

73 years & a bright future 2025

SEBANG is celebrating a remarkable milestone this year, marking 73 years of excellence and innovation. Simultaneously, SEBANG's European branch proudly turns 10, highlighting a decade of growth across the continent. As we look to the future, SEBANG remains committed to pioneering advancements in battery technology. With a strong foundation, an eye on sustainability, and a passion for cutting-edge solutions, SEBANG is poised to lead the way in powering tomorrow's world.



Sustainability

Social & environmental responsibility.



Healthy Culture

Ethical management, improved governance structure, human resources development, human rights and diversity.



Economic Values

R&D, exploration of new markets, customer satisfaction, financial soundness.



Environmental Values

Response to climate change, environmentally-friendly products, minimization of impact on environment.



Social Values

Responsible supply chain, global corporate social responsibility activities.

Environmental Awareness

SEBANG Global Battery regularly upgrades its systems for controlling, reducing and analyzing GHG emissions, energy consumption, and environmental substances. In particular, it plans to contribute to reducing not only its

direct emission volume by improving the efficiency of its production processes, but also its indirect emission volume by producing high value-added products and developing products that consume less energy.


Approach

We support climate action through eco-friendly management, adapts to evolving energy policies, and aims to grow as a green enterprise by promoting sustainable practices and enhancing environmental competitiveness.



Goals

- Enhanced control and management of air and water pollutants, chemical substances, odor, and soil
- Exploration of new tasks for saving energy and enhanced monitoring of energy saving activities.
- Re-establishment of energy technology database and upgrade of saving technologies

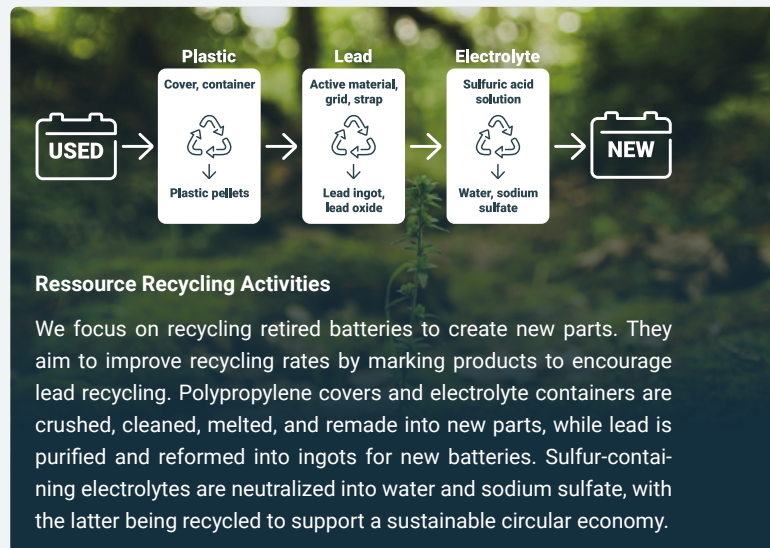


World-wide Excellence

Our Locations.



Germany

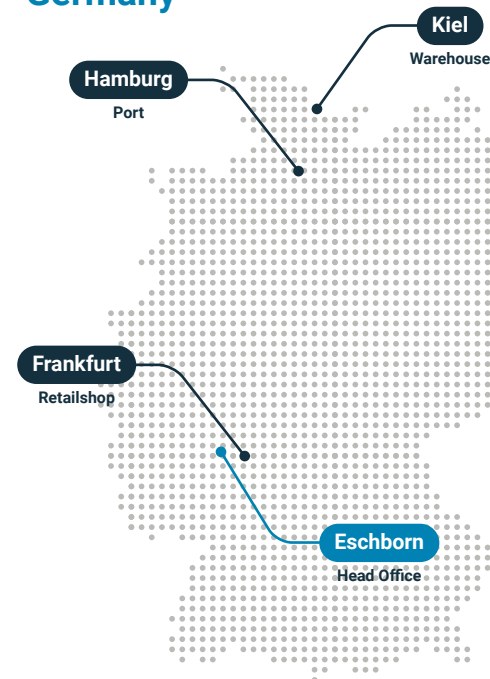

Korea



AGM Technology



This technology with increased durability and enhanced rapid charging capability uses Absorbent Glass Mat (AGM) separators, which bind the acid better and thus the existing cell volume more effectively use as standard batteries and are therefore particularly suitable for cars with start-stop technology.

The AGM battery is a next-generation vehicle battery developed for vehicles equipped with SMART power generation control systems. In traditional vehicles, the battery was only used briefly for providing starting current for the engine and 12V power for accessories like radio, lights, AC compressors, and the charging was done by sending a continuous current to maintain a fully charged state while driving, which lowered energy efficiency and fuel economy. However, most modern vehicles now have SMART power generation control

systems installed to improve fuel efficiency. Since charging is intermittent, tailored to the battery's remaining capacity, fuel efficiency has been improved, but battery usage has increased. Therefore, equipping vehicles with AGM products optimized to manage various functions and sustain more cycles compared to conventional batteries is helpful in increasing economy. AGM batteries have a longer product life and improved safety by its non-spillable nature and the use of dedicated lead plates and absorbent glass mat.

Technology Applications

Passenger Cars

Taxis

Off-Road

Small Transporters

Municipal Vehicles,
Fire Engines,
Garbage Trucks

Agricultural Machinery

Construction Machinery

Motorhomes,
Caravans, Camping

Motorboats,
Sailboats, Marine

Additional Information


Automotive
AGM Batteries

Marine & Leisure
AGM Batteries

Battery Finder

Battery Knowledge

Insight into AGM Technology

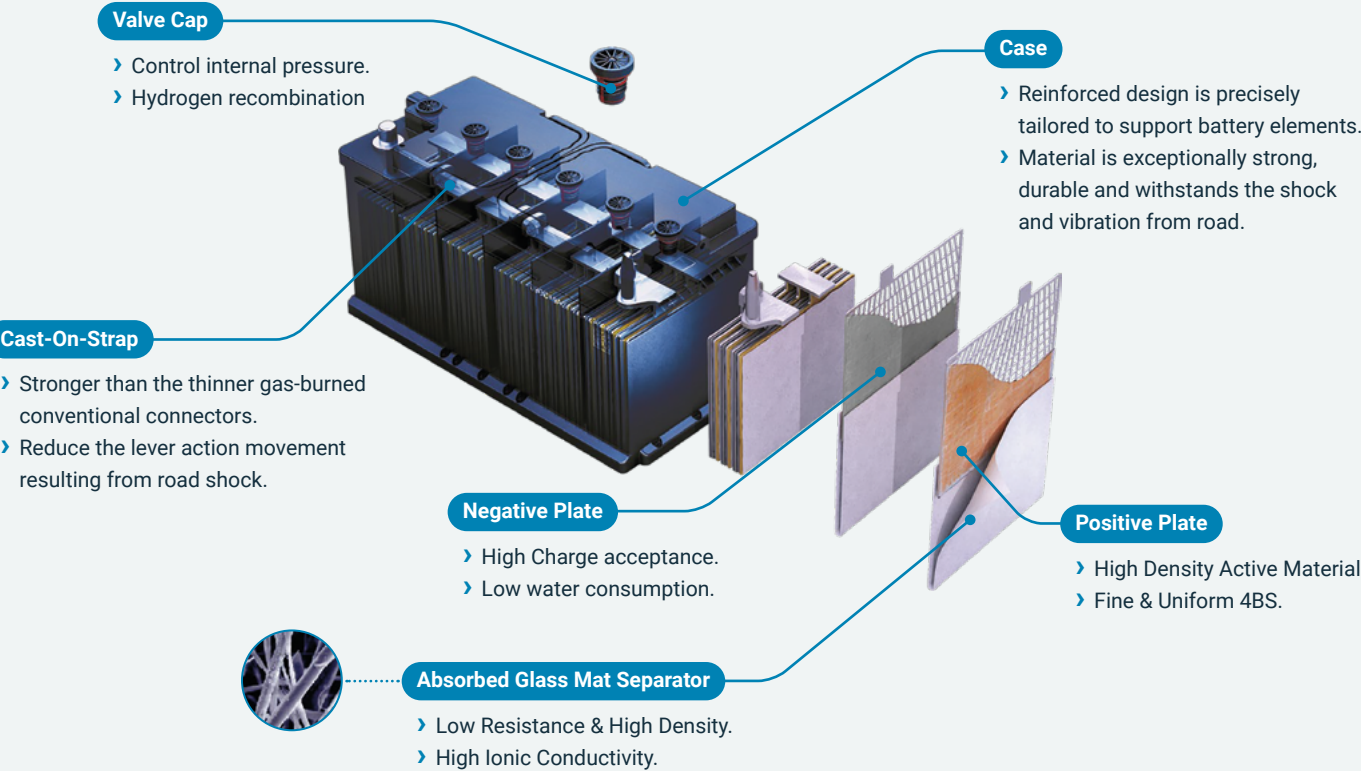

Technology Features

AGM Technology
Electrolyte is absorbed in a high density hygroscopic glass fiber mat separator to prevent leakage from the optimized substrate

Optimized for Start-Stop
Improved stratification of electric poles, substrates, active materials and electrolytes

Maximum starting reliability
for cars with start-stop technology and maximum electronic consumers

Recuperation capability
Especially for vehicles with regenerative braking

Absorbing high charging currents
Quick absorption of charging currents and reliable supply of power consumers when engine is temporarily at standstill

Improved fuel efficiency
Suitable for Start & Stop and Regenerative Braking System which let you save fuel up to 5~10%

CO2 reduction
SEBANG AGM battery is supporting human-kind's efforts with the most advanced technologies to reduce CO2 emissions

Reunion
Recombination of gases occurring inside the battery

Valve regulated
using one-way valve

Sealed gas-tight
by special plugs with integrated pressure relief valves

Maximum product safety
No acid leakage possible as the entire electrolyte is bound in the glass fleece

OE quality
Latest technology according to OEM standard and highest environmental standards at every stage of the manufacturing process

Ergonomic & retractable handles
facilitate installation in the vehicle

High vibration resistance (V3)

Absolutely maintenance-free

Minimal self-discharge
and therefore optimum shelf life

EFB Technology



This technology is a further development of the standard batteries. EFB battery is suitable for small and midsize vehicles with start-stop systems and no regenerative braking system. They have a longer lifespan than standard batteries and provide effects such as reduced gas emissions and improved vehicle convenience features, similar to AGM batteries.

SEBANG global battery's EFB batteries are providing enhanced performances with increasing capacity and durability. OE Suppliers for BMW and Volkswagen composed of Sebang Battery core technical skills. EFB (Enhanced Flooded Battery) - This technology is a further development of the standard batteries. It is suitable for small

and midsize vehicles with start-stop systems and no regenerative braking system. They have a longer lifespan than standard batteries and provide effects such as reduced gas emissions and improved vehicle convenience features, similar to AGM batteries.

Technology Applications

Passenger Cars

Small Transporters

Off-Road

Construction Machinery

Agricultural Machinery

Municipal Vehicles,
Fire Engines,
Garbage Trucks

Additional Information


Automotive EFB Batteries

Commercial EFB Batteries

Battery Finder

Battery Knowledge

Insight into EFB Technology

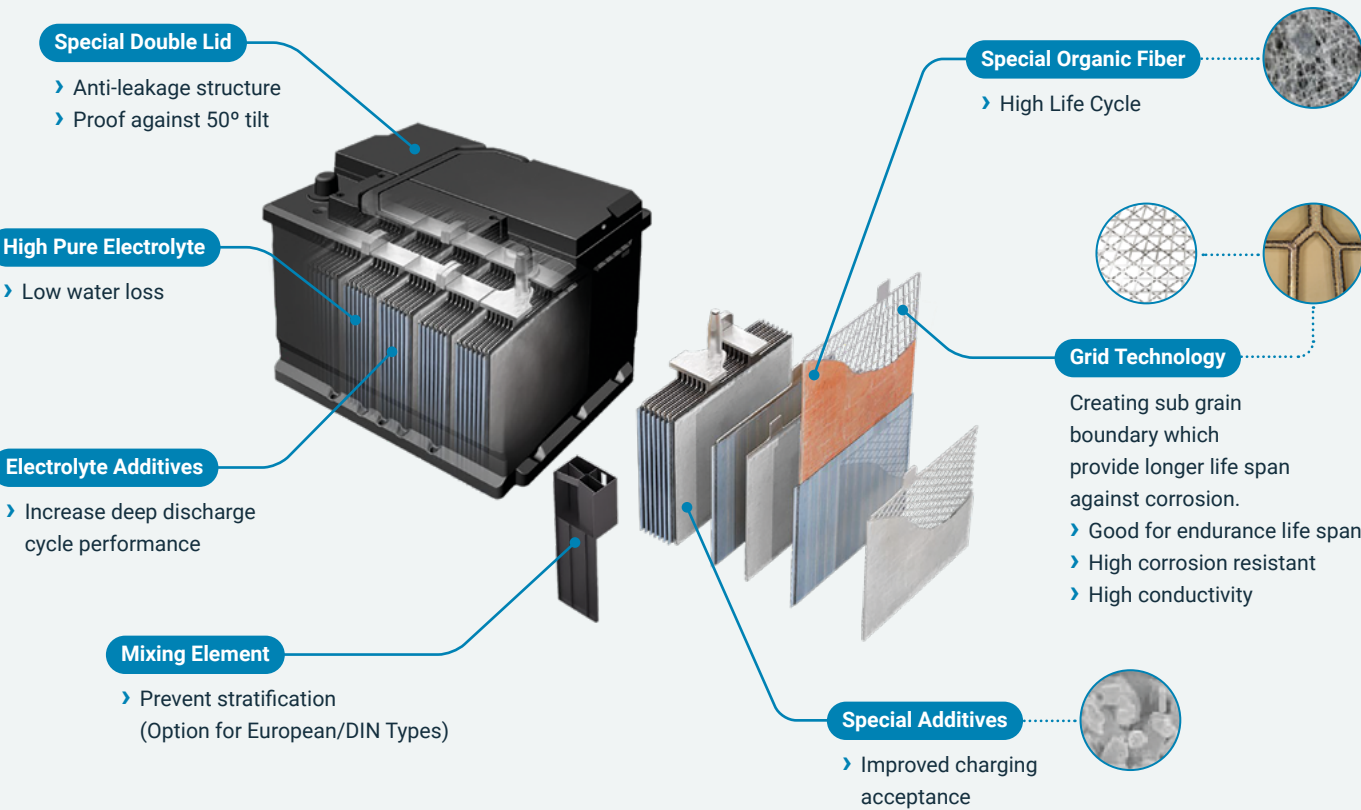

Technology Features

EFB Technology
Enhanced Flooded Battery

Ideal for cars with start-stop technology

Developed for vehicles with a large number of electronic consumers

Faster current consumption
and improved charging properties compared to standard starter flood batteries

Highest cold start performance
due to low internal resistance (CCA)

Latest technology
according to the specifications of the car manufacturer

Sealed Labyrinth double lid
with central degassing and backfire protection

Leak-proof
in the event of an accident or inclined position thanks to labyrinth lid design in accordance with Original Equipment standard (OE)

More heat-resistant than AGM
and can therefore be installed in the engine compartment

Integrated Easy Power Check
Charge status control for immediate checking of the charge status (Magic Eye)

Ergonomic & retractable handles
facilitate installation in the vehicle


Absolutely maintenance-free
in accordance with EN standard (SMF)

Higher vibration resistance
thanks to plates coated with polyester fabric

Very low self-discharge
and therefore optimum shelf life


SEBANG AGM & EFB Batteries are optimized with AMS.

AMS (Alternator Management System) controls the alternator voltage variably depending on the vehicle operating conditions to improve vehicle fuel efficiency.

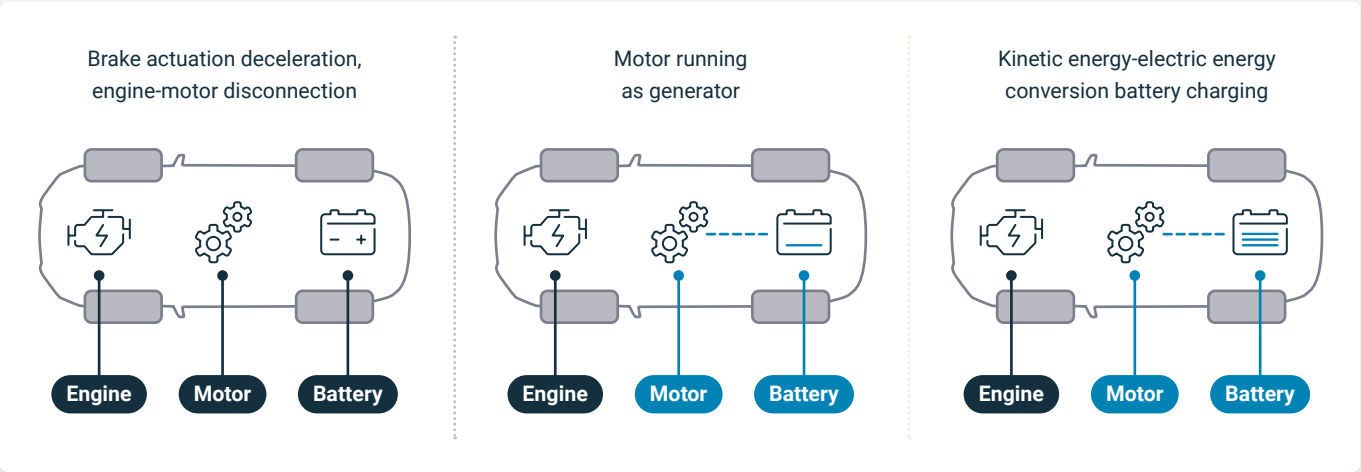

The alternator management system detects vehicle operating conditions, electrical loads, and battery charging status to control the alternator's voltage through the Engine Control Module (ECM), thereby improving fuel efficiency and maintaining optimal battery charging status. It performs charging control, discharging control, and normal control depending on the battery's charging

status and driving conditions. During acceleration, it performs discharging control to consume battery power and reduce the alternator's voltage to reduce its workload, while during deceleration, it performs charging control to increase the alternator's voltage and replenish the consumed battery voltage.

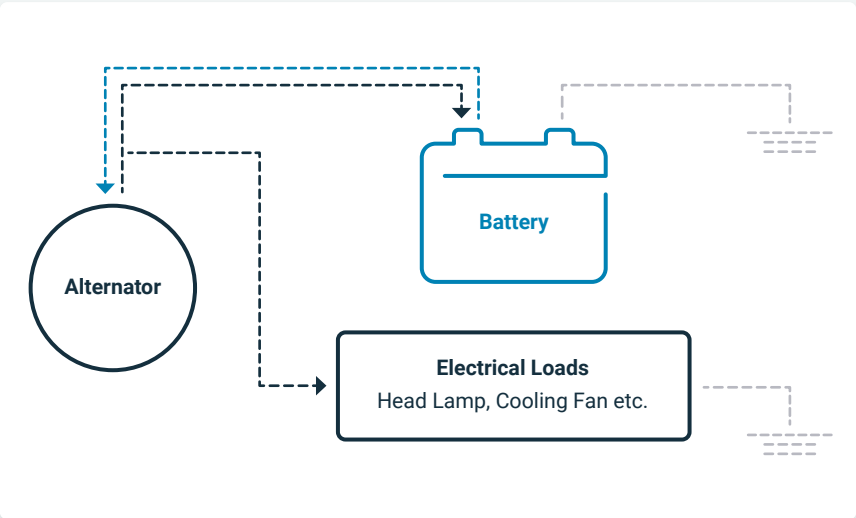


Electrical Energy Transfer
---> during Acceleration
---< during Deceleration

Alternator
Produces electrical energy and supplies power to the battery and electrical loads.

Battery
Supplies power to start the vehicle and supports the alternator during operation

Electric Loads
Devices that consume electrical energy, such as ignition systems, control units, ...

How does AMS work?

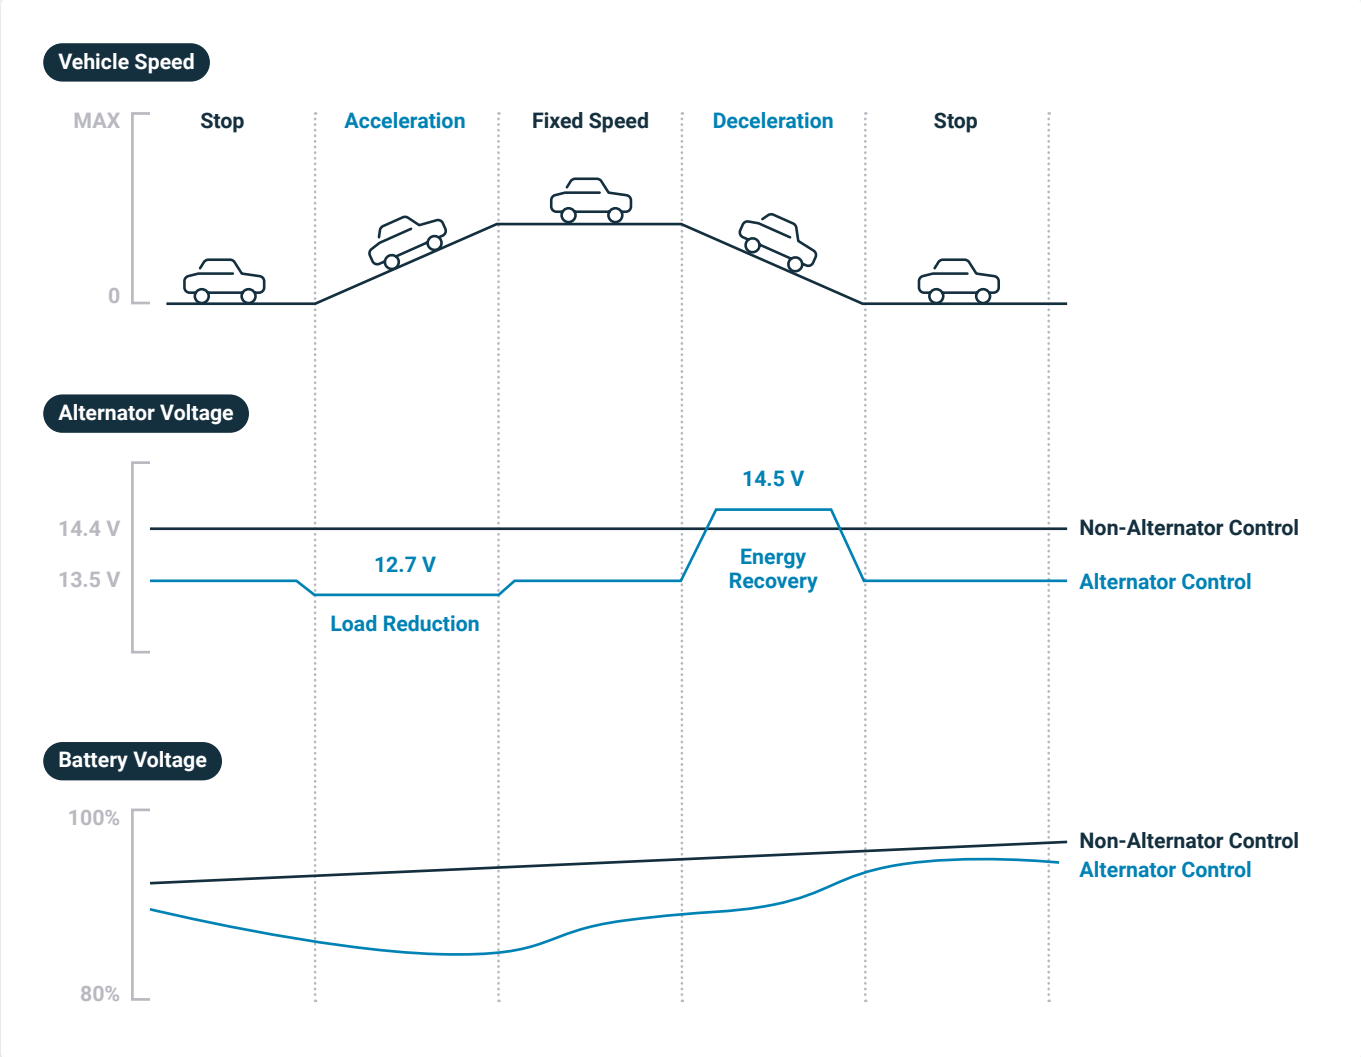

Basic Principle

The movement of electrical energy by potential difference (from high potential to low potential).

Alternator Control Vehicle

During vehicle acceleration, to reduce the engine's load, the alternator's voltage is lowered to 12.7 V, Battery's open-circuit voltage (OCV) becomes 12.8~12.9 V, which causes a potential difference, discharging the battery.

Discharging occurs only when the battery voltage is above 12.7 V, and charging occurs when it is below 12.7 V.

Non-Alternator Control Vehicle

Continues to charge with a fixed voltage of 14.4 V regardless of vehicle operating conditions (-35 mA/°C is applied when the temperature rises).

Vehicle Deceleration


During vehicle deceleration, the alternator's voltage is increased to 14.5 V to create a potential difference, charging the battery (energy recovery).

SLI Technology




The SLI PREMIUM range is a so-called wet battery or lead-acid battery with outstanding Cold Cranking Performance, best suited for vehicles with many electrical consumers without start-stop technology. As our flagship product, it has been selected as the best battery by consumers for a long time and has been steadily upgrading to meet consumers' expectations for performance.


Technology Applications




Passenger Cars




Small Transporters



Off-Road




Construction Machinery




Agricultural Machinery


Technology Features




SLI Technology
Starting, Lightning & Ignition




Developed for vehicles with a large number of electronic consumers




High cold start performance
due to special calcium alloy grid and low internal resistance




State-of-the-art Calcium-Calcium technology




Fully sealed structure
and a Labyrinth double lid water recovery system with central degassing and backfire protection




Leak-proof
in the event of an accident or inclined position thanks to labyrinth lid design in accordance with Original Equipment standard (OE)




Integrated Easy Power Check
Charge status control for immediate checking of the charge status (Magic Eye)




95% market coverage
with the Europe TOP7 range => reduced costs thanks to optimized stock levels




Sealed Maintenance Free (SMF)



Minimized self-discharge
and maximized recovery performance with new materials: special tissue and special alloy (HTC)




Absolutely maintenance-free
in accordance with EN standard (SMF)




High vibration resistance


Insight into SLI Technology

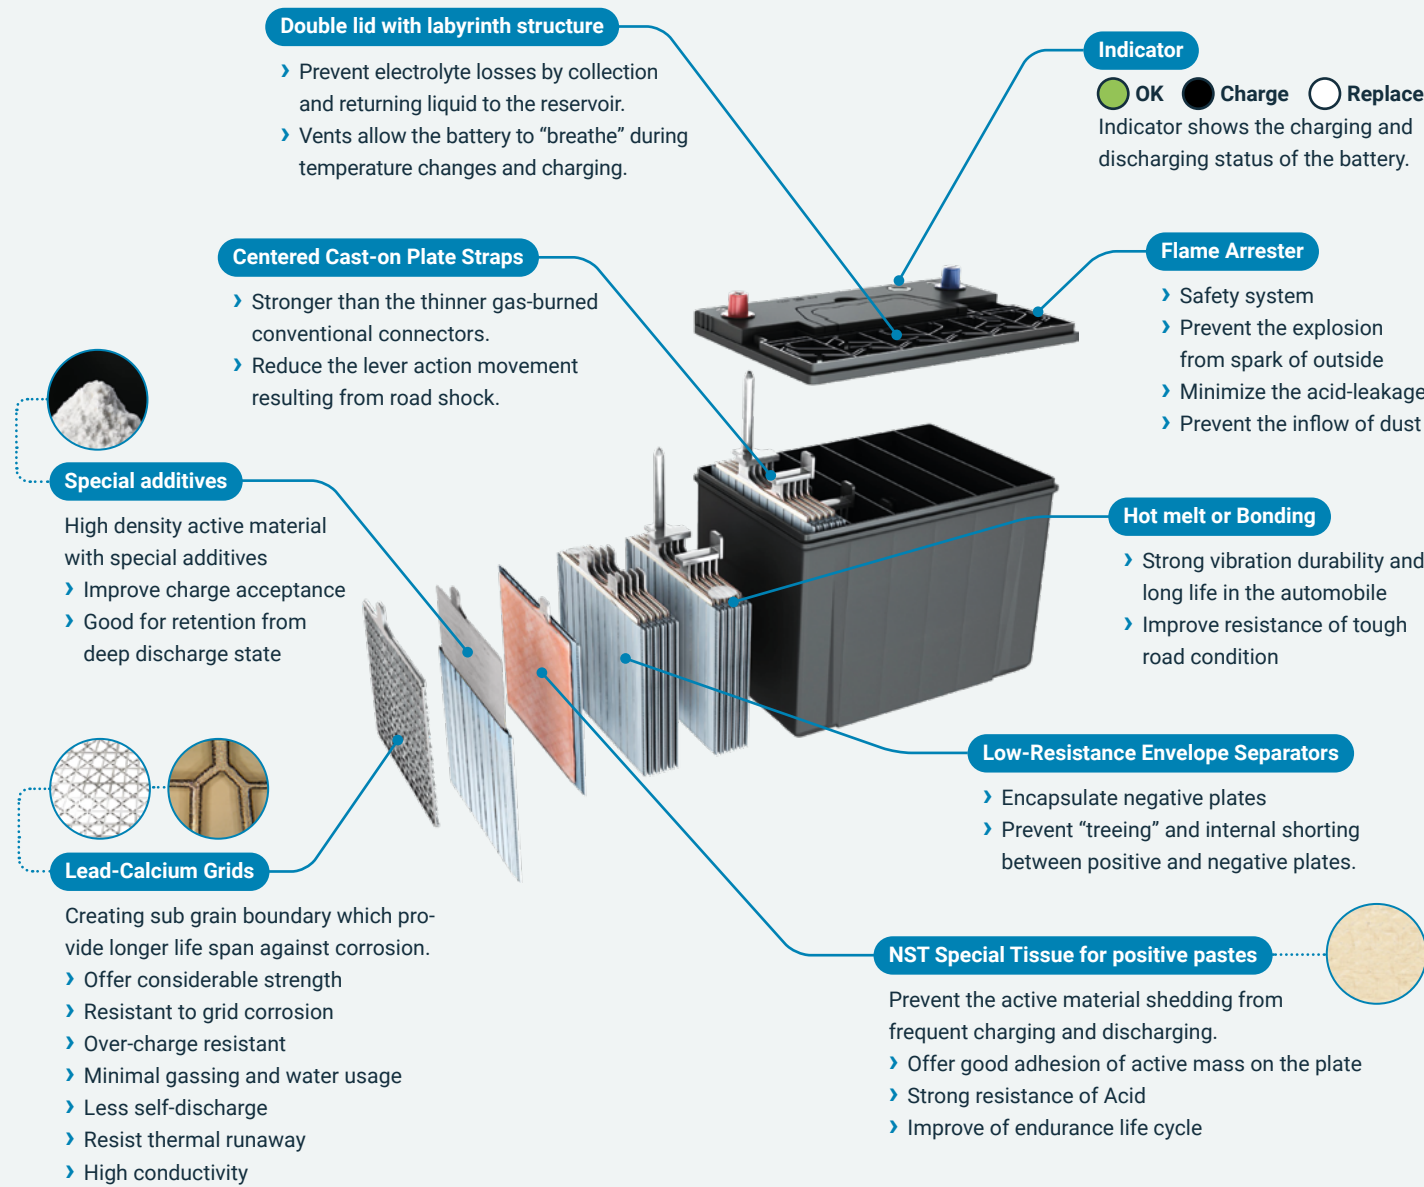


Additional Information




Automotive
SLI Batteries




Commercial SHD
SLI Batteries




Commercial HD
SLI Batteries



Lawn & Garden
SLI Batteries



Battery Finder



Battery Knowledge

Deep Cycle Technology




Longest Series which are used in golf cart and electric vehicles contains special know-how of Sebang Global Battery. Cell balancing function which allows to prolong life span and improved technical skills that expands the range of use temperature.


The SEBANG Deep Cycle Battery is characterized by 70 years of know-how built for Deep Cycle Service. Longest series are made by Sebang's lead-acid battery technical

skill which is accumulated for half century. It is exclusively used for Cycle service such as golf cart, electric vehicle, and unmanned transportation.


Technology Applications




Lifting Platforms




Small Fork Lifts



Golf Carts,
Electric Vehicles



Sweepers,
Cleaning Machines



Solar

Additional Information



Motive
Deep Cycle Batteries




Battery Finder




Battery Knowledge


Insight into Deep Cycle Technology

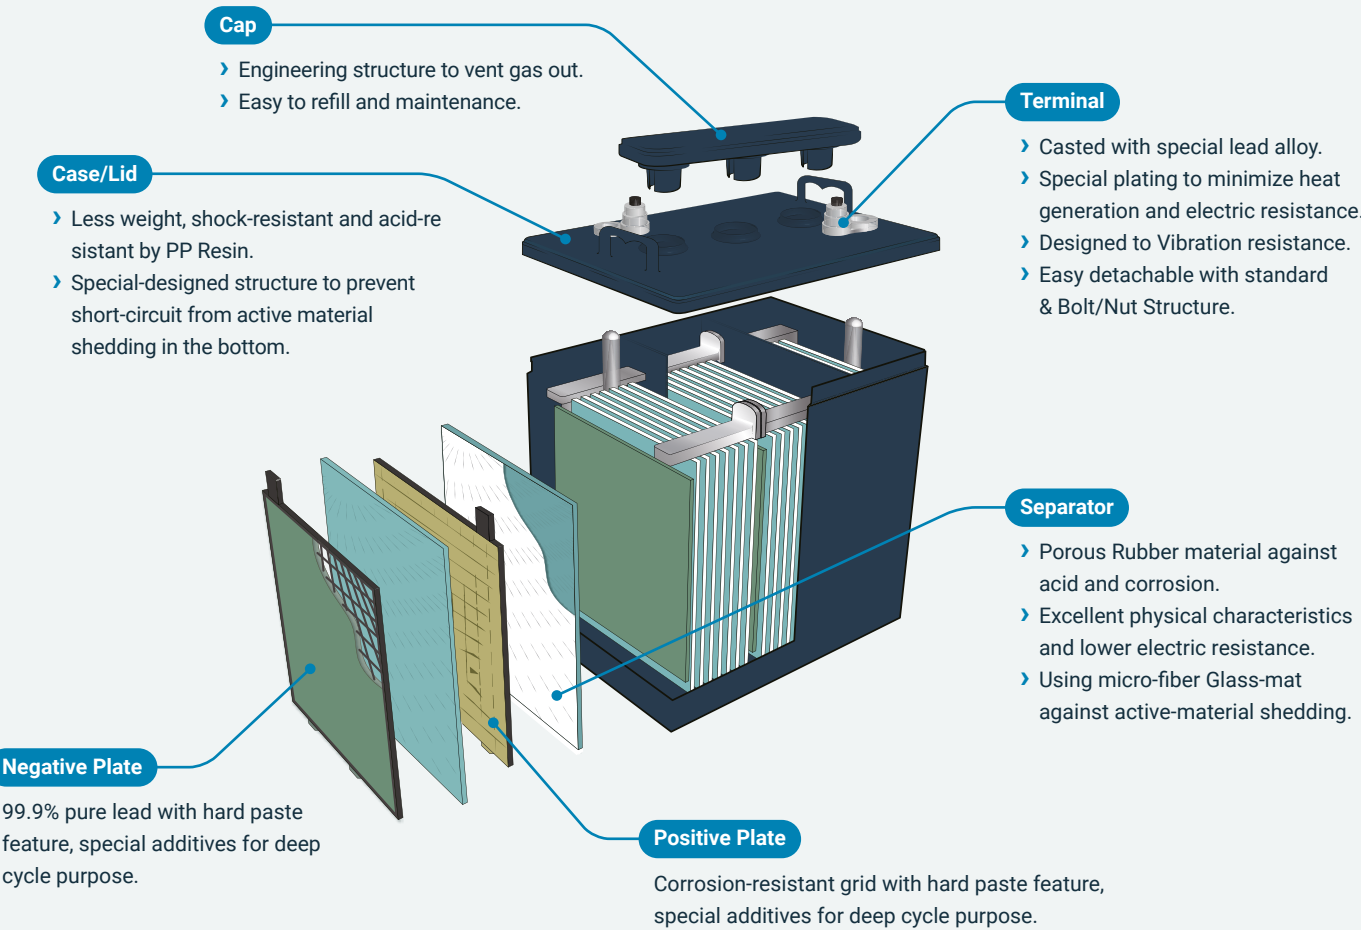


Technology Features




Deep cycle flooded lead-acid technology




Specially coated terminals
that are resistant to heat & electrical resistance




Lightweight, acid-resistant & shockproof design
prevents electrolyte leakage




Designed to be safe from vibration
by minimizing heat and electrical resistance at the terminals through a special coating



Use of microfiber glass mats
to prevent leakage of active material



Technical structure for venting gas



Easy to refill and maintain

AGM Series



A vehicle battery with increased durability and with enhanced rapid charging capability appropriate for vehicles with Start Stop system and Recuperation capability.



AGM Batteries

- Passenger Cars
- Taxis
- Off-Road
- Small Transporters
- Municipal Vehicles, Fire Engines, Garbage Trucks
- Agricultural Machinery, Harvesters, Combine Harvesters
- Construction Machinery, Telescopic Handlers, Wheel Loaders
- Motorhomes, Caravans, Camping
- Motorboats, Sailboats, Marine

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
L1	GR050AGM	50	560	207	175	190	0	1	B13	80
L2	GR060AGM	60	640	242	175	190	0	1	B13	64
L3	GR070AGM	70	760	278	175	190	0	1	B13	64
L4	GR080AGM	80	800	315	175	190	0	1	B13	48
L5	GR095AGM	95	850	353	175	190	0	1	B13	48
L6	GR105AGM	105	950	394	175	190	0	1	B13	48

Additional battery types available on request.



AGM DUAL Batteries

- Motorboats, Sailboats, Marine
- Motorhomes, Caravans, Camping
- Solar
- Lifting Platforms
- Golf Carts, Electric Vehicles
- Sweepers, Cleaning Machines
- Small Fork Lifts

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
L1	GR050AGM-DUAL	50	560	207	175	190	0	1	B13	80
L2	GR060AGM-DUAL	60	640	242	175	190	0	1	B13	64
L3	GR070AGM-DUAL	70	760	278	175	190	0	1	B13	64
L4	GR080AGM-DUAL	80	800	315	175	190	0	1	B13	48
L5	GR095AGM-DUAL	95	850	353	175	190	0	1	B13	48
L6	GR105AGM-DUAL	105	950	394	175	190	0	1	B13	48

Additional battery types available on request.

EFB Series



SEBANG's EFB batteries are providing enhanced performances with increasing capacity and durability for small and midsize vehicles with Start Stop system.



EFB Batteries

- Passenger Cars
- Small Transporters
- Off-Road
- Construction Machinery, Telescopic Handlers, Wheel Loaders
- Agricultural Machinery, Harvesters, Combine Harvesters
- Municipal Vehicles, Fire Engines, Garbage Trucks

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
L1	GR050EFBA	50	500	207	175	190	0	1	B13	115
L2	GR060EFBA	60	560	242	175	190	0	1	B13	90
L3B	GR065EFBA	65	650	278	175	175	0	1	B13	75
L3	GR070EFBA	70	680	278	175	190	0	1	B13	75
L4B	GR075EFBA	75	730	315	175	175	0	1	B13	75
L4	GR080EFBA	80	730	315	175	190	0	1	B13	75
L5	GR095EFBA	95	850	353	175	190	0	1	B13	60

Additional battery types available on request.

EFB Asia Batteries

B19	GR035EFBB	35	360	187	127	225	0	3	B0	128
B19	GR040EFBB	40	420	197	129	225	0	3	B0	128
B24	GR055EFBB	55	460	238	129	225	0	3	B0	96
D23	GR065EFBB	65	550	232	173	225	0	1	B0	80
D26	GR070EFBB	70	680	260	174	225	0	1	B0	72
D31	GR095EFBB	95	760	303	173	225	0	1	B0	60

Additional battery types available on request.



EFB Commercial Batteries

- Construction Machinery, Telescopic Handlers, Wheel Loaders
- Agricultural Machinery, Harvesters, Combine Harvesters
- Commercial Vehicles, Delivery Vehicles
- Trucks
- Coaches
- Municipal Vehicles, Fire Engines, Garbage Trucks

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
B	GR180EFBA	185	1200	513	222	220	3	1	B0	28
C	GR230EFBA	230	1350	518	276	241	3	1	B0	24

Additional battery types available on request.

SLI Series



The premium range is a so-called wet battery or lead-acid battery with outstanding Cold Cranking Performance, best suited for vehicles with many electrical consumers without start-stop technology.



SLI Batteries

- Passenger Cars
- Small Transporters
- Off-Road
- Construction Machinery, Telescopic Handlers, Wheel Loaders
- Agricultural Machinery, Harvesters, Combine Harvesters

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
L0	GR040B	40	350	175	175	190	0	1	B13	120
L1B	GR040A	40	340	207	175	175	0	1	B13	115
L1B	GR045EU	45	420	207	175	175	0	1	B13	115
L1B	GR052A	52	460	207	175	175	0	1	B13	115
L1	GR044B	44	350	207	175	190	1	1	B13	115
L1	GL044B	44	350	207	175	190	1	1	B13	115
L1	GR050B	50	400	207	175	190	0	1	B13	115
L2B	GR050A	50	460	242	175	175	0	1	B13	90
L2B	GR055EU	55	510	242	175	175	0	1	B13	90
L2B	GR065EU	65	540	242	175	175	0	1	B13	90
L2	GR055B	55	440	242	175	190	0	1	B13	90
L2	GL055B	55	440	242	175	190	1	1	B13	90
L2	GR062B	62	480	242	175	190	0	1	B13	90
L2	GL062B	62	480	242	175	190	1	1	B13	90
L2	GR066B	66	530	242	175	190	0	1	B13	90
L3B	GR068A	68	580	278	175	175	0	1	B13	75
L3B	GR075EU	75	620	278	175	175	0	1	B13	75
L3	GR072B	72	580	278	175	190	1	1	B13	75
L3	GL072B	72	580	278	175	190	1	1	B13	75
L3	GR075B	75	620	278	175	190	0	1	B13	75
L3	GR078EU	78	660	278	175	190	0	1	B13	75
L4B	GR080A	80	730	315	175	175	0	1	B13	75
L4	GR080B	80	660	315	175	190	0	1	B13	75
L5B	GR088A	88	770	353	175	175	0	1	B13	60
L5B	GR090EU	90	820	353	175	175	0	1	B13	60
L5	GR095EU	95	780	353	175	190	0	1	B13	60
L5	GR100EU	100	820	353	175	190	0	1	B13	60
L6	GR110B	110	900	394	175	190	0	1	B13	48

● Topseller

Additional battery types available on request.



SLI Asia Batteries

- Passenger Cars
- Small Transporters
- Off-Road
- Construction Machinery, Telescopic Handlers, Wheel Loaders
- Agricultural Machinery, Harvesters, Combine Harvesters

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
B19	GR035C	35	280	187	127	225	0	3	B0	128
B19	GL035C	35	280	187	127	225	1	3	B0	128
B19	GR035CBL	35	280	187	127	225	0	3	B1	128
B24	GR045C	45	380	238	129	225	0	3	B0	96
B24	GL045C	45	380	238	129	225	1	3	B0	96
B24	GR045D	45	380	238	129	225	0	1	B0	96
B24	GL045D	45	380	238	129	225	1	1	B0	96
D23	GR060C	60	470	232	173	225	0	1	B0	80
D23	GL060C	60	470	232	173	225	1	1	B0	80
D23	GR065C	65	520	232	173	225	0	1	B0	80
D23	GL065C	65	520	232	173	225	1	1	B0	80
D23	GR065CBL	65	520	232	173	225	0	1	B1	80
D23	GL065CBL	65	520	232	173	225	1	1	B1	80
D26	GR070C	70	570	260	174	225	0	1	B0	72
D26	GL070C	70	570	260	174	225	1	1	B0	72
D26	GR070CBL	70	570	260	174	225	0	1	B1	72
D26	GL070CBL	70	570	260	174	225	1	1	B1	72
D26	GR080C	80	660	260	174	225	0	1	B0	72
D26	GL080C	80	660	260	174	225	1	1	B0	72
D26	GR080CBL	80	660	260	174	225	0	1	B1	72
D26	GL080CBL	80	660	260	174	225	1	1	B1	72
D31	GR100C	100	780	303	173	225	0	1	B0	60
D31	GL100C	100	780	303	173	225	1	1	B0	60
D31	GR100CBL	100	780	303	173	225	0	1	B1	60
D31	GL100CBL	100	780	303	173	225	1	1	B1	60
E41	GR100E	100	680	410	175	235	0	1	B0	48

● Topseller

Additional battery types available on request.



U1 Batteries


- Lawn Tractors, Ride-on Mowers, Snowmobiles

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
U1	GL026U1	26	250	195	127	182	1	LUG	B0	160
U1	GR026U1R	26	250	195	127	182	0	LUG	B0	160
U1	GR030U1R	30	300	195	127	182	0	LUG	B0	160
U1	GL030U1	30	300	195	127	182	1	LUG	B0	160
U1	GL032U1	32	330	195	127	182	1	LUG	B0	160
U1	GR032U1R	32	330	195	127	182	0	LUG	B0	160

● Topseller

Additional battery types available on request.

Commercial Batteries



The SEBANG Commercial Batteries are characterized by exceptionally high cycling performance. This high cycling performance results from the latest and most efficient technologies.



EFB Commercial Batteries

Construction Machinery, Telescopic Handlers, Wheel Loaders

Agricultural Machinery, Harvesters, Combine Harvesters

Commercial Vehicles, Delivery Vehicles

Trucks

Coaches

Municipal Vehicles, Fire Engines, Garbage Trucks

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
B	GR180EFBA	185	1200	513	222	220	3	1	B0	28
C	GR230EFBA	230	1350	518	276	241	3	1	B0	24

Additional battery types available on request.



SHD Batteries

Construction Machinery, Telescopic Handlers, Wheel Loaders

Agricultural Machinery, Harvesters, Combine Harvesters

Commercial Vehicles, Delivery Vehicles

Trucks

City Buses

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
MAC	GR110SHD	110	800	513	175	210	3	1	B3	32
MAC	GRD135SHD	135	910	513	175	210	3	1	B3	32
A	GR120SHD	120	840	513	189	223	3	1	B3	32
A	GRC135SHD	135	910	513	189	223	3	1	B0	32
A	GR140SHD	140	950	513	189	223	3	1	B0	32
B	GR155SHD	155	950	513	222	220	3	1	B0	28
B	GR170SHD	170	1000	513	222	220	3	1	B0	28
B	GR180SHD	180	1000	513	222	220	3	1	B0	28
C	GR200SHD	200	1150	518	273	241	3	1	B0	24
C	GR230SHD	230	1200	518	273	241	3	1	B0	24

● Topseller

Additional battery types available on request.



HD Batteries

Construction Machinery, Telescopic Handlers, Wheel Loaders

Agricultural Machinery, Harvesters, Combine Harvesters

Commercial Vehicles, Delivery Vehicles

Trucks

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
LOT7	GR110C	110	780	346	173	233	0	1	B0	48
LOT7	GL110C	110	780	346	173	233	1	1	B0	48

Additional battery types available on request.



Light BCI Batteries

Passenger Cars

Small Transporters

Construction Machinery, Telescopic Handlers, Wheel Loaders

Agricultural Machinery, Harvesters, Combine Harvesters

Commercial Vehicles, Delivery Vehicles

Trucks

Motorboats, Sailboats, Marine

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
BCI 75	GL055BS	55	620	231	179	185	1	SIDE	B7	72
BCI 78	GL070BS	70	740	260	179	185	1	SIDE	B7	72

Additional battery types available on request.



HD BCI Batteries

Passenger Cars

Small Transporters

Construction Machinery, Telescopic Handlers, Wheel Loaders

Agricultural Machinery, Harvesters, Combine Harvesters

Commercial Vehicles, Delivery Vehicles

Trucks

Motorboats, Sailboats, Marine

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
BCI 31	GR100UNI	100	800	330	173	239	9	1	B0	48
BCI 31	GR110UNI	110	950	330	173	239	9	1	B0	48
BCI 31	GR115UNI	115	1000	330	173	239	9	1	B0	48

Additional battery types available on request.

Marine & Leisure Batteries

Our **AGM** or **DCM DUAL** Starter and Leisure Battery series offer excellent power supply for starters and power supply.



AGM DUAL Batteries

- Motorboats, Sailboats, Marine
- Motorhomes, Caravans, Camping
- Solar
- Lifting Platforms
- Golf Carts, Electric Vehicles
- Sweepers, Cleaning Machines
- Small Fork Lifts

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
L1	GR050AGM-DUAL	50	560	207	175	190	0	1	B13	80
L2	GR060AGM-DUAL	60	640	242	175	190	0	1	B13	64
L3	GR070AGM-DUAL	70	760	278	175	190	0	1	B13	64
L4	GR080AGM-DUAL	80	800	315	175	190	0	1	B13	48
L5	GR095AGM-DUAL	95	850	353	175	190	0	1	B13	48
L6	GR105AGM-DUAL	105	950	394	175	190	0	1	B13	48

Additional battery types available on request.



DCM DUAL Batteries


- Motorboats, Sailboats, Marine
- Motorhomes, Caravans, Camping
- Solar

Box Size	Product Code	Capacity Ah (20h)	CCA A (EN)	Length mm	Width mm	Height mm	Layout	Terminal	Base Hold- Down	Quantity per Pallet
M24	GL082DCM	82	600	260	174	222	1	TM	B1	72
M27	GL095DCM	95	700	304	173	225	1	TM	B1	60
M31	GL100DCM	100	710	330	173	239	1	TM	B1	48

Additional battery types available on request.

Motive Batteries

Longest Series which are used in golf cart and electric vehicles, and electric forklift batteries both contains special know-how of Sebang Global Battery.



Deep Cycle Longest Batteries


- Lifting Platforms
- Small Fork Lifts
- Golf Carts, Electric Vehicles
- Sweepers, Cleaning Machines
- Solar
- Lawn Tractors, Ride-on Mowers, Snowmobiles

Box Size	Product Code	Voltage V	Capacity Ah (20h)	C5 Ah	RC@75A Ah	Length mm	Width mm	Height mm	Terminal	Cap	Quantity per Pallet
GC	L-605-GLOBAL	6V	210	175	105	264	181	276	EHPT / EAPT	Gang / IND	54
GC	L-105-GLOBAL	6V	225	185	115	264	181	276	EHPT / EAPT	Gang / IND	54
GC	L-125-GLOBAL	6V	240	195	132	264	181	276	EHPT / EAPT	Gang / IND	54
GC	L-145-GLOBAL	6V	260	215	145	264	181	295	EHPT / EAPT	Gang / IND	54
GC	L-875-GLOBAL	8V	170	145	80	264	181	276	EHPT / EAPT	Gang / IND	54
GC	L-890-GLOBAL	8V	190	155	90	264	181	276	EHPT / EAPT	Gang / IND	54
GC	L-8125-GLOBAL	8V	240	190	110	264	181	314	EHPT / EAPT	Gang / IND	54
GC	L-1275-GLOBAL	12V	150	125	70	329	181	276	EHPT / EAPT	Gang / IND	36


● Topseller

Additional battery types available on request.

Cap Options

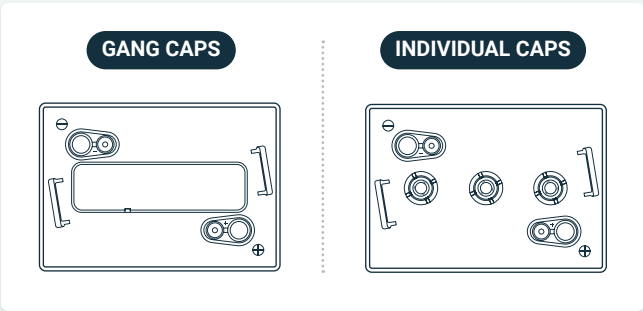

Terminal

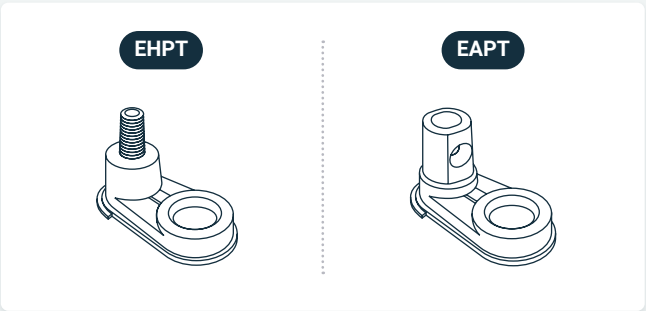

Technical Information

Terminal

STANDARD (1)

SMALL (3)

STUD

SIDE

DUAL

TM

LUG

Layout

0

1

3

4

9

18

Base Hold Down

B0

without Bottom Hold Down

B1

2 Bottom Hold Down
10.5 mm high on long sides

B3 / B13

4 Bottom Hold Down
10.5 mm high on all four sides

B4

2 Bottom Hold Down
19 mm high on long sides

B7

2 Bottom Hold Down
9.7 mm high on long sides

B8


2 Bottom Hold Down
13.5 mm high on long sides

B9


4 Bottom Hold Down
10.5 mm high on long sides
29 mm on short sides

Battery Principles & Features

Self-discharge rate by temperature

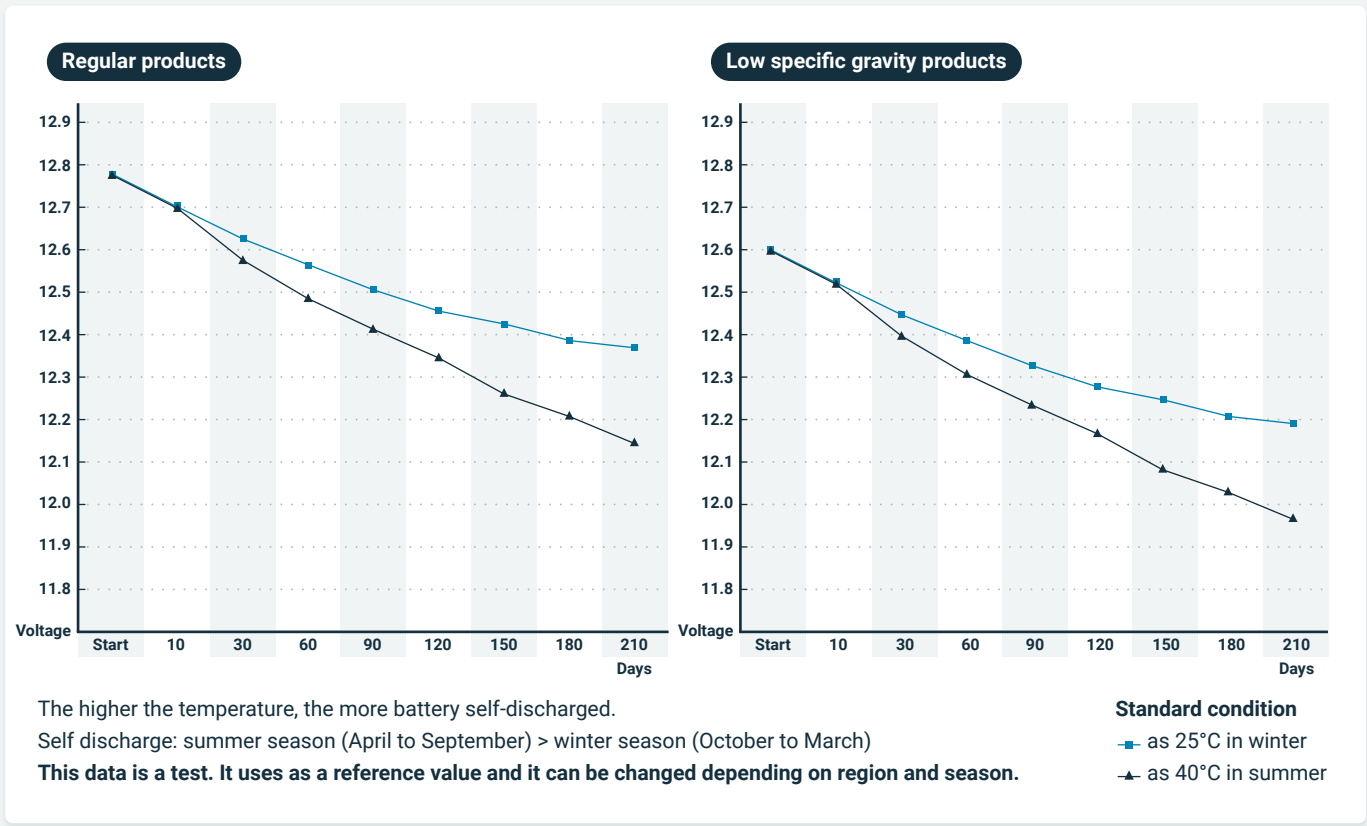

Changes in the required engine starting load and available capacity of the battery by temperature

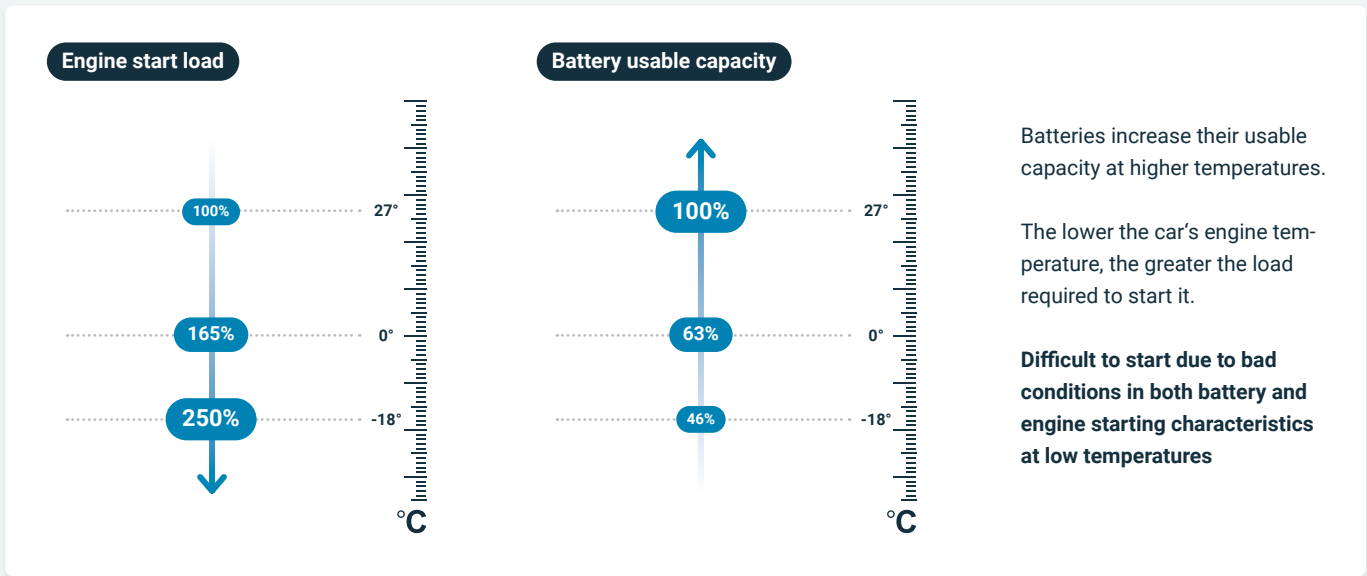

Safety Advice

Procedure of Replacement

Step 1

Switch off the engine and Keep sparks, flames, cigarettes away from battery at all times, before removing the old battery.

Step 2

Disconnect the negative terminal, first and avoid short-circuit caused by tools, when removing old battery.

Step 3

Clean corroded parts in tray and cable clamps, before installation of new battery.

Step 4

Connect the positive terminal, first and check the terminal clamps for tight fit, when installing new battery.

Precautions

- › No sparks, flames, or smoking.
- › Charge in a well-ventilated area.
- › Remove from vehicle prior to charging.
- › Read your vehicle, booster, and battery manuals prior to charging.
- › In case of exposure to acid, flush immediately with water, then get immediate medical help.
- › Do not block or alter the vent hole.
- › Keep out of reach of children.

WARNING!

Lead-acid batteries generate explosive gases. Keep sparks, flames, and lighted cigarettes away from the battery. When charging or using the battery in an enclosed space, provide ventilation.

This battery contains sulfuric acid. Avoid contact with skin, eyes, or clothing. In the event of an accident, flush with water and call a physician immediately.

Flammables

Read Instructions Carefully

Keep out of Reach of children

Caution of Sulfuric Acid

Shield Eyes

Explosive

Battery, wet, filled with acid

**SEBANG Batteries Europe GmbH**

Alfred-Herrhausen-Allee 3-5

65760 Eschborn

Germany

Phone: +49 (0)6196 7668 100

E-Mail: info@sebang-europe.com



www.sebang-europe.com

SEBANG Headquarters

433, Seolleung-ro, Gangnam-gu

06212 Seoul

Republic of Korea

Gwangju Plant

287, Sonjae-ro, Gwangsan-gu

62209 Gwangju

Republic of Korea

Changwon Plant

122, Jeongdong-ro, Seongsan-gu

51537 Changwon-si

Republic of Korea